

Smart Module

Monocrystalline PERC Module with Half-cut Cell Technology and Integrated Power Optimizer

SPV355-R60DBMG / SPV360-R60DBMG

SMART MODULE



PV to grid solution including full service from SolarEdge

- Easy installation with module pre-assembled power optimizer
- Optimized energy output by constantly tracking the maximum power point (MPPT) of each module individually
- Module-level voltage shutdown for installer and firefighter safety
- Full visibility of system performance from module to grid
- Superior quality control with full automatic production line
- Excellent mechanical loading and shock resistance performance
- Elegant design with black frame
- 15-year module warranty and 25-year performance warranty
- Specifically designed to work with SolarEdge inverters

Smart Module Monocrystalline PERC Module with Half-cut Cell Technology and Integrated Power Optimizer


SPV355-R60DBMG / SPV360-R60DBMG

MODULE ELECTRICAL PROPERTIES

STC ⁽¹⁾	SPV355-R60DBMG	SPV360-R60DBMG	
Module Power	355	360	W
Max. Power Voltage (Vmp)	33.74	33.87	V
Max. Power Current (Imp)	10.53	10.63	A
Open Circuit Voltage (Voc)	41.51	41.66	V
Short Circuit Current (Isc)	10.96	11.07	A
Maximum System Voltage		1000	Vdc
Maximum Series Fuse Rating		20	A
Module Efficiency	19.0	19.27	%
Power Measurement Tolerance		0 ~ +5	W
NOCT ⁽²⁾			
Module Power	266	270	W
Max. Power Voltage (Vmp)	30.97	31.09	V
Max. Power Current (Imp)	8.59	8.67	A
Open Circuit Voltage (Voc)	38.66	38.8	V
Short Circuit Current (Isc)	9.01	9.10	A

MODULE MECHANICAL PROPERTIES

Cells	120 (6 x 20)	
Cell Type	Monocrystalline PERC	
Cell Dimensions	166 x 83	mm
Dimensions (L x W x H)	1776 x 1052 x 40	mm
Front Side Maximum Load (Snow)	5400	Pa
Rear Side Maximum Load (Wind)	2400	Pa
Weight (with Power Optimizer)	23	kg
Front Glass	3.2mm, coated tempered glass	
Frame	Black anodized aluminium	
Junction Box	IP68, three diodes	
Connector Type	Staubli MC4	
Operating Temperature	-40 to +85	°C
Packaging Information (units per pallet)	26	

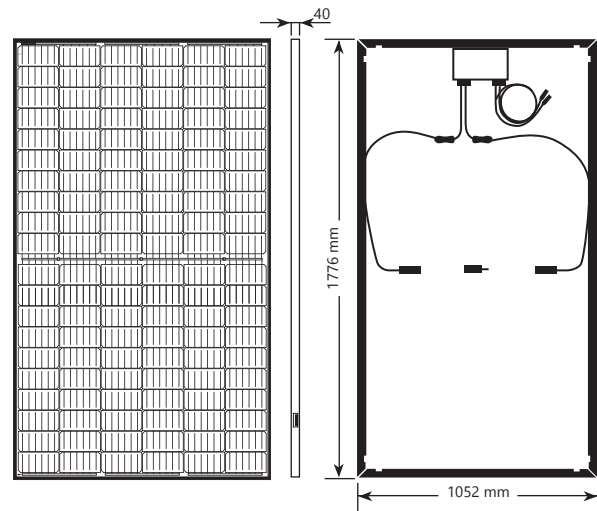

CERTIFICATIONS & WARRANTY


Module Certifications	IEC 61215:2016, IEC61730:2016
Product Warranty	Power Optimizer — 25-year warranty, Module — 15-year warranty
Output Warranty of Pmax	25-year linear module warranty ⁽³⁾

TEMPERATURE CHARACTERISTICS


Temperature Coefficient Power (Pm)	0.364	% / °C
Temperature Coefficient Voltage (Voc)	-0.281	% / °C
Temperature Coefficient Current (Isc)	0.039	% / °C
Operating Cell Temperature (NOCT)	45 ± 2	°C

- (1) STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5
 (2) NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s
 (3) 1st year: 97%, 80.2% power output over 25 years

Linear Warranty 15-Year Product Warranty + 25-Year Linear Power Warranty

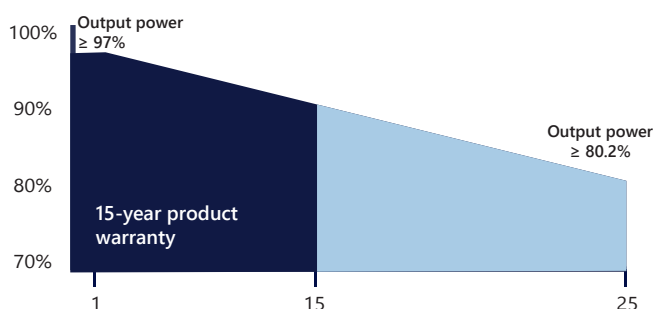

Module I-V Curve (SPV360-R60DWMG)

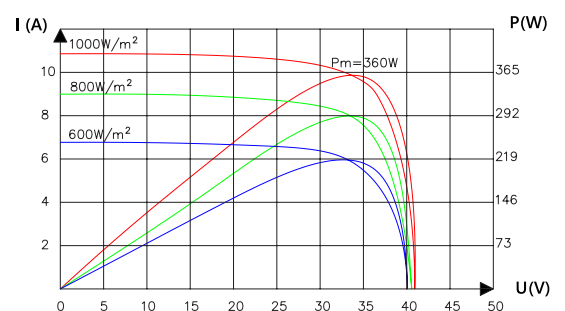

Smart Module Monocrystalline PERC Module with Half-cut Cell Technology and Integrated Power Optimizer

SPV355-R60DBMG / SPV360-R60DBMG

POWER OPTIMIZER PROPERTIES

INPUT

Rated Input DC Power	375	W
Absolute Maximum Input Voltage (Voc at lowest temperature)	60	
MPPT Operating Range	8 - 60	Vdc
Maximum Short Circuit Current (Isc)	11.75	Adc
Maximum Efficiency	99.5	%
Weighted Efficiency	98.8	%
Overvoltage Category	II	

OUTPUT DURING OPERATION (POWER OPTIMIZER CONNECTED TO OPERATING SOLAREEDGE INVERTER)

Maximum Output Current	15	Adc
Maximum Output Voltage	60	Vdc

OUTPUT DURING STANDBY (POWER OPTIMIZER DISCONNECTED FROM SOLAREEDGE INVERTER OR SOLAREEDGE INVERTER OFF)

Safety Output Voltage per Power Optimizer	1 ± 0.1	Vdc
---	---------	-----

STANDARD COMPLIANCE

EMC	FCC Part15 Class B, IEC61000-6-2, IEC61000-6-3	
Safety	IEC62109-1 (class II safety), UL1741	
RoHS	Yes	
Fire Safety	VDE-AR-E 2100-712:2013-05	

INSTALLATION SPECIFICATIONS

Output Connector	MC4	
Output Wire Length	1.2 / 3.9	m / ft
Operating Temperature Range	-40 - +85 / -40 - +185	°C / °F
Protection Rating	IP68 / NEMA6P	
Relative Humidity	0 - 100	%

PV System Design Using a SolarEdge Inverter	Single Phase HD-Wave	Single Phase	Three Phase	Three Phase for 277/480V Grid	
Minimum String Length (Power Optimizers)	8		16	18	
Maximum String Length (Power Optimizers)	25			50	
Maximum Power per String	5700	5250	11250 ⁽⁴⁾	12750 ⁽⁵⁾	W
Parallel Strings of Different Lengths or Orientations	Yes				

(4) For 230/400V grid: It is allowed to install up to 13,500W per string when the maximum power difference between the strings is up to 2,000W

(5) For 480V grid: It is allowed to install up to 15,000W per string when the maximum power difference between the strings is up to 2,000W